
Herkules

HERKULES AIRGOMATIC HLS 3213

For ergonomic lifting of all common vehicle model

- 3.2 tons lifting capacity
- 1300 mm lifting height
- For a wheelbase up to 3500 mm
- Fold-down driveover ramps



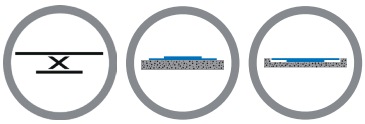

DIMENSIONS	
Lifting height (on-ground/in-ground)	1300/1140 mm
Overdrive height (on-ground)	110 mm
Pit depth (in-ground)	160 mm

HERKULES AIRGOMATIC HLS 3213


Part.no.	Lifting capacity	Air supply	Wheel base (min./ max.)	Lifting time	Lowering time	Weight	Installation
HLS 3213-11	3,2 t	8 bar	1600/3500 mm	ca. 25 s*	ca. 30 s*	925 kg	On-ground
HLS 3213-14	3,2 t	8 bar	1600/3300 mm	ca. 25 s*	ca. 30 s*	865 kg	In-ground
HLS 3213-16	3,2 t	8 bar	1600/3300 mm	ca. 25 s*	ca. 30 s*	865 kg	In-ground, CE-Stop**
HLS 3213-17	3,2 t	8 bar	1600/3500 mm	ca. 25 s*	ca. 30 s*	950 kg	Transmobil (HLT-06)


* With empty lift
**Safety stop with audible alarm to prevent foot injuries

HERKULES HLS 1200

A compact lift for space-saving requirements

- 2.5 tons lifting capacity
- Easy to install in the workshop
- Stepless lifting heights for ergonomic working position

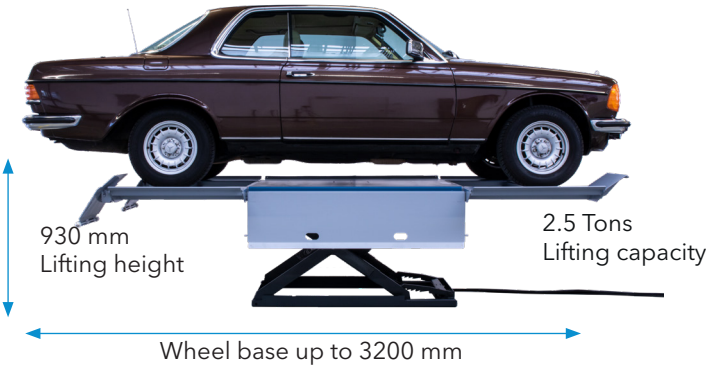

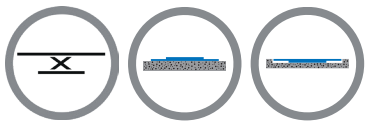

DIMENSIONS	
Lifting height (on-gound/in-ground)	930/805 mm
Overdrive height (on-ground)	110 mm
Pit depth (in-ground)	125 mm

HERKULES HLS 1200

Part.no.	Lifting capacity	Air supply	Wheel base (min./ max.)	Lifting time	Lowering time	Weight	Installation
HLS 1200-11	2,5 t	8 bar	1500/3200 mm	ca. 25 s*	ca. 30 s*	750 kg	On-ground
HLS 1200-14	2,5 t	8 bar	1500/3000 mm	ca. 25 s*	ca. 30 s*	750 kg	In-ground
HLS 1200-16	2,5 t	8 bar	1500/3000 mm	ca. 25 s*	ca. 30 s*	750 kg	In-ground, CE-Stop**
HLS 1200-17	2,5 t	8 bar	1500/3200 mm	ca. 25 s*	ca. 30 s*	800 kg	Transmobil (HLT-3)

* With empty lift
**Safety stop with audible alarm to prevent foot injuries