

EXPANDABLE LENGTH:
Adjust the length upto 250 mm for extra long battery.




TOGGLE CLAMP:
To move & lock the lift sideways by 20 mm.




MECHANICAL SAFETY LOCK:
Engage to bring the lift to a complete safe position for maintenance.



WHEEL GUARD:
Heavy duty wheel with foot protection.



THREADED HOLES:
Multiple mounting options for different battery sizes.

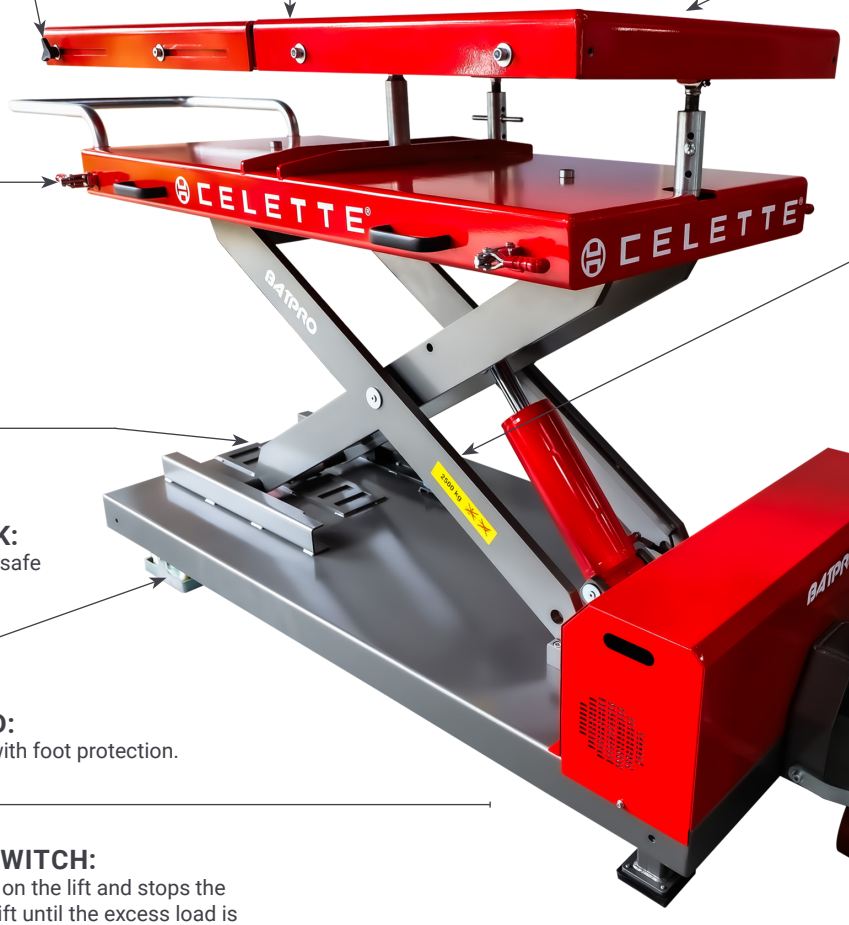



SPIRIT LEVEL:
Visualize the angle of tilt to avoid excess tilting with load. It can be used to level the top plate horizontally to gravity.



LIMIT SWITCH:
Restricts the lift to rise beyond maximum height.



REMOTE CONTROLLER:
Dual speed control for easy alignment.



TOWING JACK:
Helps in the mobility of the lift. It also serves as a braking mechanism when the towing jack is not engaged.



PRESSURE SWITCH:
Detects overload on the lift and stops the operation of the lift until the excess load is removed from the lift.





MINUTE TILTING AND SLIDING ADJUSTMENT UPTO 20 MM
When the car is not aligned parallel to the floor, tilt the lift to align it accordingly to the car body.



NON-RETURN VALVE:
Restricts unintentional flow of oil out of the cylinder. Acts as an additional safety mechanism.

SPECIAL FEATURES