
Herkules

HERKULES AIRGOMATIC 3213 DUO

Adaptive lift for most diverse requirements



- 3.2 tons lifting capacity
- 1300 mm lifting height
- Lifting on wheel or on chassis
- Flat arms and hightened drive ways

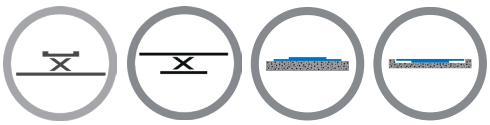

ALTERNATIV





DIMENSIONS

Lifting height (on-ground/in-ground)	1300/1140 mm
Overdrive height (on-ground)	110 mm
Pit depth (in-ground)	160 mm


HERKULES AIRGOMATIC 3213 DUO

Part.no.	Lifting capacity	Air supply	Wheel base (min./ max.)	Lifting time	Lowering time	Weight	Installation
HLS 3213-DUO-11	3,2 t	8 bar	1600/3500 mm	ca. 25 s*	ca. 30 s*	1050 kg	On-ground
HLS 3213-DUO-14	3,2 t	8 bar	1600/3300 mm	ca. 25 s*	ca. 30 s*	955 kg	In-ground
HLS 3213-DUO-16	3,2 t	8 bar	1600/3300 mm	ca. 25 s*	ca. 30 s*	955 kg	In-ground, CE-Stop**
HLS 3213-DUO-17	3,2 t	8 bar	1600/3500 mm	ca. 25 s*	ca. 30 s*	1070 kg	Transmobil (HLT-06)

* With empty lift
**Safety stop with audible alarm to prevent foot injuries

HERKULES HLS 1200 DUO

User-friendly and variable lift even for confined spaces

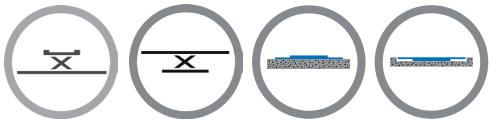

- 2.5 tons lifting capacity
- Lifting on wheel or on chassis
- Installation on ground or in ground



ALTERNATIV



DIMENSIONS

Lifting height (on-ground/in-ground)	930/825 mm
Overdrive height (on-ground)	110 mm
Pit depth (in-ground)	115 mm

HERKULES HLS 1200 DUO

Part.no.	Lifting capacity	Air supply	Wheel base (min./ max.)	Lifting time	Lowering time	Weight	Installation
HLS 1200-DUO-11	2,5 t	8 bar	1500/3200 mm	ca. 25 s*	ca. 30 s*	850 kg	On-ground
HLS 1200-DUO-14	2,5 t	8 bar	1500/3000 mm	ca. 25 s*	ca. 30 s*	850 kg	In-ground
HLS 1200-DUO-16	2,5 t	8 bar	1500/3000 mm	ca. 25 s*	ca. 30 s*	850 kg	In-ground, CE-Stop**
HLS 1200-DUO-17	2,5 t	8 bar	1500/3200 mm	ca. 25 s*	ca. 30 s*	850 kg	Transmobil (HLT-03)

* With empty lift
**Safety stop with audible alarm to prevent foot injuries