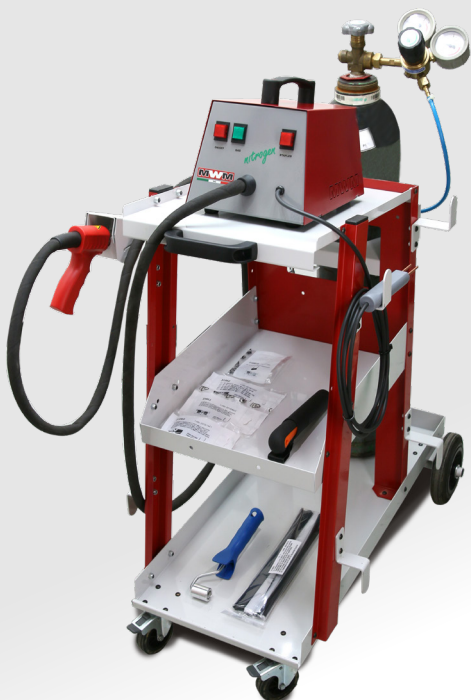




DOUBLE GAS PLASTIC WELDER

TROLLEY VERSION

Professional trolley, designed for repairing bumpers and plastic components in car body shops. Developed around DOUBLE GAS PLASTIC WELDER, the dual-supply welding machine by MWM (compressed air + nitrogen from a refillable cylinder), equipped with a built-in stapler.

REDUCED NITROGEN CONSUMPTION


The “N₂Ready” system allows the airflow to be switched to nitrogen through the gun trigger, eliminating nitrogen waste while always ensuring proper cooling of the heating element.

WATCH
THE N₂READY
VIDEO



WELDER AND AUXILIARY TOOLS



*CYLINDER NOT INCLUDED

 DOUBLE GAS WELDER	 RG 80 TROLLEY	 GUN PROTECTION	 SCRAPER
 COMPRESSION ROLLER	 KIT JUNCTIONS AND HOSES	 GAS BOTTLE HOLDER PANEL	 GAS BOTTLE HOLDER CHAIN 0,6 MT

WELDING STICKS - 31831

5 PCS 1,4 x 10 x 300 mm PP 	5 PCS 1,6 x 16 x 300 mm PP 	5 PCS 1,5 x 5,8/5,8 x 300 mm PP 
5 PCS 1,4 x 10 x 300 mm PP 	5 PCS 1,6 x 16 x 300 mm PP 	5 PCS 1,5 x 5,8/5,8 x 300 mm PP 

PATENTED PRE-CUT STAPLES (INOX 0,7 mm)

 100 PCS SQUIGGLE	 00 PCS INSIDE CORNER SQUIGGLE	 100 PCS WINDING 5 POINTS	 KIT 10 PCS PLASTIC SMART SMOOTHER
--	--	---	--

WELDER TECHNICAL DATA

VOLTAGE	230 V
FREQUENCY	50/60 Hz
POWER CONSUMPTION	210 W
INPUT PRESSURE	6 ÷ 8 Bar 87 ÷ 114 psi
OUTPUT FLOW (measured at 1 atm)	15 ÷ 20 NI/min
OPERATING FLOW TEMPERATURE	480 ÷ 500 °C
POWER CABLE	2 m - 78 3/4"
GUN CABLE	3 m - 118 1/8"
STAPLER CABLE	3 m - 118 1/8"
DIMENSIONS	60 x 78 x 105 cm 23 5/8" x 30 11/16" x 41 5/16"
WEIGHT	23,2 kg - 51,2 lb
PACKAGING	80x60x60 cm - 31 Kg 31 1/2" x 23 5/8" x 23 5/8" - 68,3 lb